

Mistral

Plinth Heater supplied with Programmable Thermostat
2.4 kW



Usage

A good solution to provide heat in a kitchen or similar environments where wall space is restricted. Supplied with a programmable thermostat and 3 fascia finishes: black, white and stainless steel.

Features and Benefits


Plinth Heater

- Plinth heater fits neatly into plinth board beneath kitchen units
- Space saving - no need for a separate radiator
- Durable steel construction
- Plinth heater comes with 3 stylish fascia finishes: black, white or stainless steel
- 2.4 kW power rating
- 3 power settings, 0.8 kW, 1.6 kW and 2.4 kW
- Cable prewired (2 m) for versatile installation options
- Smooth and quiet operation
- Simple to use
- Overheat protection
- Fits in a standard 140 or 150 mm plinth, min plinth height 130 mm
- Fan only setting for air circulation in summer months

Programmable Thermostat

- Programmable thermostat fitted on wall above worktop allows convenient touch screen control
- Slimline profile fits in standard pattress
- Manual or program operation setting
- Operating temperature range 5 - 35°C
- Program configurable in 6 time periods per day
- Open window detection to reduce energy wastage
- Memory recall after power off

Product Code	Power (kW)	Current (amps)
ML2400	2.4	10

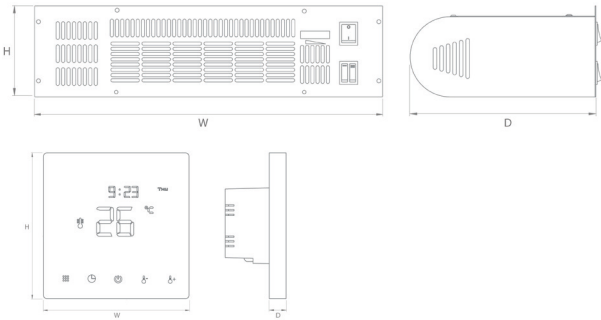

Plinth Heater
Outer Casing
 Durable pressed steel

Controls
 On/ off switch

3 power settings 0.8 kW, 1.6 kW and 2.4 kW.

Thermostat dial.

Safety
 Overheat temperature protection.

IP Rating
 IP20

Electrical Connection
 Supplied with a pre-wired white cable (2 m), cable entry to the left of the heater.

Class II

Approvals
 CE, UKCA

Standard Warranty
 1 year parts or replacement warranty.

Programmable Thermostat
Outer Casing
 ABS

Controls
 Digital LCD display, touch screen controls.

Temperature display (°C)

Temperature Range
 5 - 35 °C

IP Rating
 IP20

Installation
 Wall mounting screws included.

Electrical Connection
 Installation must comply with current IET wiring regulations.

Compatible with standard pattress.

The product should be connected to the fixed wiring of the property via a suitably rated isolating switch with a contact separation of at least 3mm in all poles.

Class I

Approvals
 CE, UKCA

Standard Warranty
 1 year parts or replacement warranty.

Product Code	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)
ML2400	125	480	215	4.7
PT01	86	86	10*	0.25

*Compatible with standard pattress. Back box fitting 26 mm depth, 50 mm height.